


KBSW180163 Slamcore


Slamcore ,

- 1 slamcore
- 2 SSIDSLAMWARE-XXXXXXXXXX: **SLAMWARE-A7959E**
- 3 WIFI
- 4 **192.168.11.1adminadmin111**

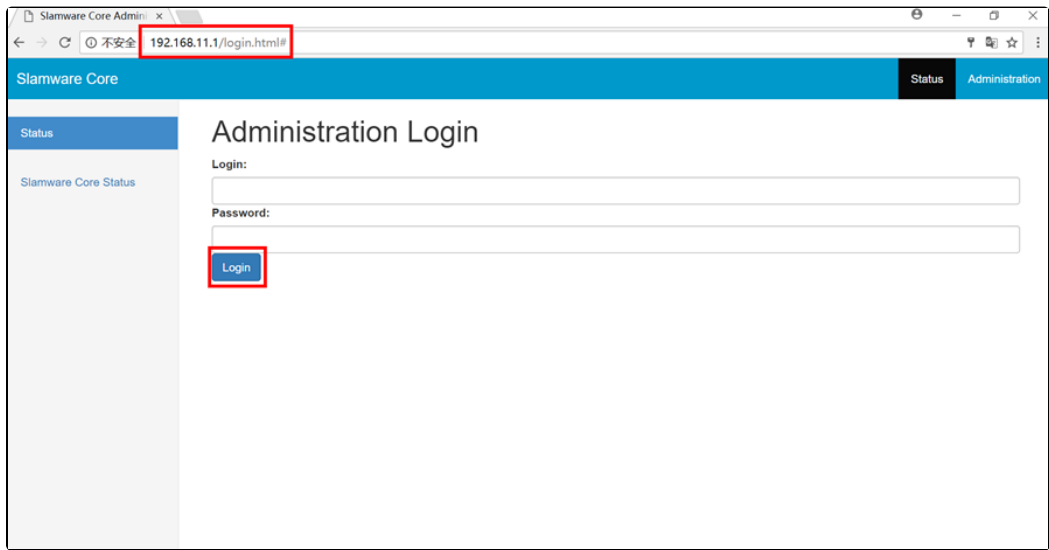

IEFirefoxChrome

5 slamcore Update Firmware

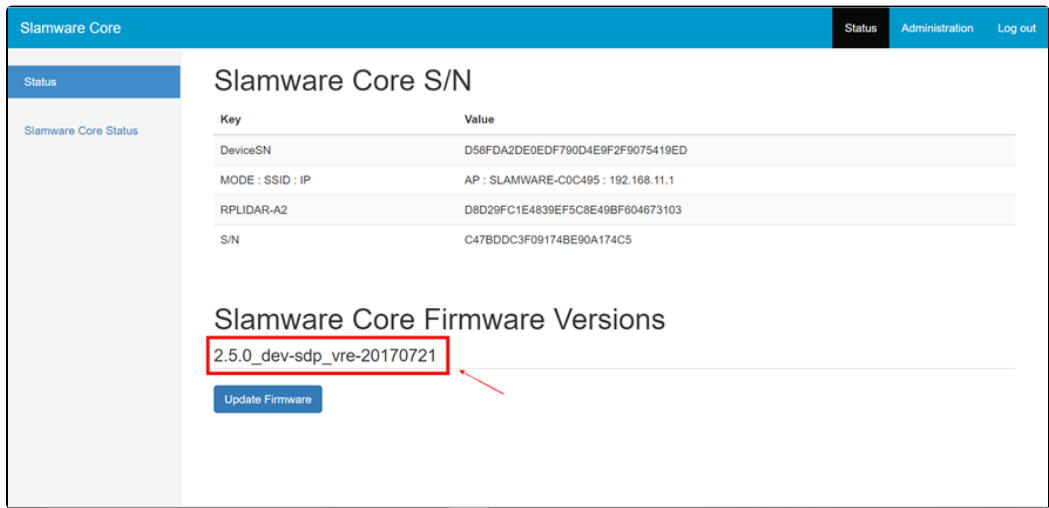

Slamware Core

Status Administration Log out

Status

Slamware Core Status

Key	Value
DeviceSN	D58FDA2DE0EDF790D4E9F2F9075419ED
MODE : SSID : IP	AP : SLAMWARE-COC495 : 192.168.11.1
RPLIDAR-A2	D4D29FC1E4839EFC8E49BF604873103
SIN	C478C0C3F09174BE90A174C5

Slamware Core Firmware Versions

2.5.0_dev-sdp_vre-20170721

Component	Version
FWNAME	slamware-cp0.rpom
FWVERSION	2.50
FWNAME	sdp-base.rpom
FWVERSION	1.0
FWGMS	547855ce4e58d54794862653600838
FWNAME	slamware-slamwared.rpom
FWVERSION	2.5.0_dev
FWNAME	sdp-ut.rpom
FWVERSION	2.5.0
FWVERSION	2.5.0_dev-sdp_vre-20170721
VERSION	2.5.0_dev-sdp_vre-20170721

Update Firmware

电量: 100%

6""XXX.bin "System Upgrade".

Administration

Restart Module

Update Firmware

Enable Debug Access

Configure Network

Slamware Core Firmware Update

Firmware File

选择文件 sdp_phoenix2.5.0dev.20170718.bin

System Upgrade

Administration

Restart Module

Update Firmware

Enable Debug Access

Configure WiFi

Diagnose Slamware Core

Change Admin Password

Slamware Core Firmware Update

Firmware File

选择文件 未选择任何文件

Upgrade Firmware

Slamware Core Full System Update

Firmware File

选择文件 未选择任何文件

Upgrade Full System

"Slam ware Core Firmware Update" "Slamware Core Full System Update" "Upgrade Full System"

7 breakout""

Slamware Core System Update

Unzip package : Success

Verify update package : Success

Unzip system image : Success

Compress config files : Success

Mount rootfs_data : Success

Save config files : Success

upgrade system, please wait several minutes for upgrade to complete...

8 SLAMWARE-XXXXXX wifi, 192.168.11.1

Status

Slamware Core Status

Key	Value
DeviceSN	D58FDA2DE0EDF790C4E9F2F9075419ED
MODE : SSID : IP	AP : SLAMWARE-COC495 : 192.168.11.1
RPLIDAR-A2	D8D29FC1E4839EF5C8E49BF604673103
S/N	C478DDC3F091748E90A174C5

Slamware Core Firmware Versions

2.5.0_dev-sdp_vre-20170718

Component	Version
FW1NAME	slamware-cp0.rprom
FW1VERSION	2.5.0
FW2NAME	sdp-base.rprom
FW2VERSION	1.0
FW3MD5	460856f680a9be93762998f0a43054a9
FW3NAME	slamware-slamwared.rprom
FW3VERSION	2.3.0_alpha
FW4NAME	sdp-ui.rprom
FW4VERSION	2.5.0
FWVERSION	2.5.0_dev-sdp_vre-20170718
VERSION	2.5.0_dev-sdp_vre-20170718

Update Firmware